

TOUCAN REGULAR

VERTICAL VACUUM PACKAGING MACHINE



FEATURES

- Standard with 1 seal bars: 420 mm
- Standard double seal (two wires). Optional without extra costs: Wide seal
- Seal bar easily removable for cleaning and maintenance purposes
- Pump capacity: 21 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-35 sec
- Standard Digital control with Time control and a 10 program memory
- Soft Air to protect the product and vacuum bag (option without extra costs)
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with a platform for stand-up pouches (self-standing)

OPTIONS

- Bi-Active seal
- Sensor control/Advanced Control System
- Liquid control
- Gas flush

ACCESSORIES

- Internal powder filter
- External liquid filter
- Service kit for standard maintenance
- Trolley with shelf
- Zebra ZD410 thermal label printer (only in combination with Advanced Control System)

DESCRIPTION

The robust, stainless steel Toucan Regular vertical vacuum packaging machine is standard equipped with a Busch vacuum pump and Digital control with a 10 program memory. This table-top model complies with CE standards.




Henkelman offers standard 3 year warranty against defects in materials and workmanship.

VACUUM PACAGKING MACHINE TOUCAN REGULAR – SPECS



VACUUM PACKAGING MACHINE TOUCAN REGULAR – SPEC SHEET

DIMENSIONS

In mm



OUTER DIMENSIONS
Toucan 42

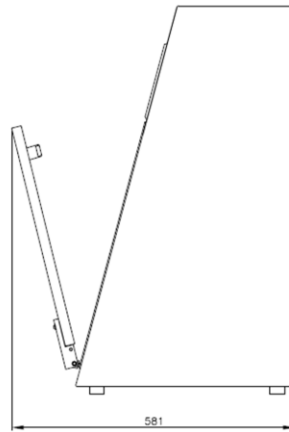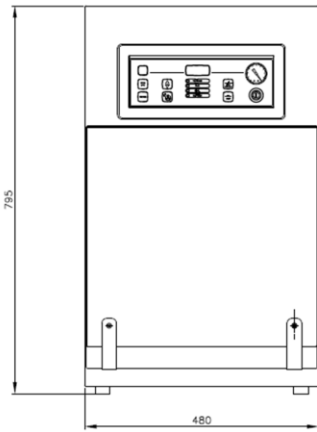

Model	Dimensions (mm)		Voltage (Hz)	Pump capacity	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
Toucan Regular	85 x 390 x 275	581 x 480 x 795	230V-1-50	21 m ³ /h	0,75-1,0	79



HENKELMAN BV
Titaniumlaan 10
5221 CK 's-Hertogenbosch
The Netherlands

Sales support
P +31 73 621 36 71
E info@henkelman.com
Service/technical support
P +31 73 621 36 71
E service@henkelman.com